
Fiber Optic Splice Closure
In-Line Type

Model: NCM-FOSC-IL-08-C

Features

- Fixed with buckles, Sealed with Silicon, easy to open
- Small dimension, cable in& out from left and right, input from the base, easy installation and maintenance
- Easy to install and reopen, no need the special training
- Equipped with sizes of cable rings for kinds of cables in and
- 8pcs fast connectors on the base, available 8pcs cables
- The 8 pcs of fusion fast connectors at the bottom can meet the requirement of maximum 8 pcs of optic fiber fast and straight fusion output at the same time.

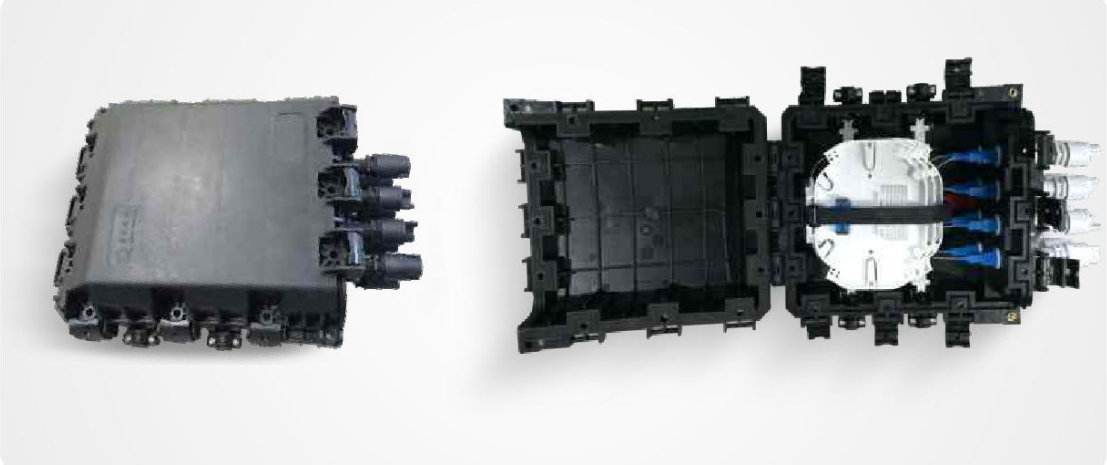

Fiber Optic Splice Closure

Unless otherwise noted, the above specifications reflect typical device performance at stated reference levels in the recommended operating configuration(s). Specifications are subject to change without notice.

NCM-FOSC-IL-08-C (1.2 Rev2019) © 2000-2019 NCM Supplies – All Rights Reserved

NCM Supplies Inc.
8125 NW 64th ST. Miami, Florida 33166
Phone: 305-640-0461 Fax: 305-639-2684
ncm@ncmsupplies.com | www.ncmsupplies.com

Fiber Optic Splice Closure
In-Line Type

Model: NCM-FOSC-IL-08-C

Specifications

Parameter	Unit	Value
Max Capacity	fiber	36
Color	-	Black
Height	mm	117.2
Width	mm	248
Length	mm	276
Applicable Cable Diameter	mm	9-11
Applicable environment	-	Aerial, pipe-lined
Reopen	-	Open without tools
Material	-	PP
Cable Sealing Method	-	Mechanical sealing
Connecting method for drop cable	-	Plug outside the closure
Inlets	-	4 Round Ports
Splitter & Adapter	-	1pc 1*8 splitters available, 8pcs SC single mode adapters available

Unless otherwise noted, the above specifications reflect typical device performance at stated reference levels in the recommended operating configuration(s). Specifications are subject to change without notice.

NCM-FOSC-IL-08-C (1.2 Rev2019) © 2000-2019 NCM Supplies – All Rights Reserved

NCM Supplies Inc.
8125 NW 64th ST. Miami, Florida 33166
Phone: 305-640-0461 Fax: 305-639-2684
ncm@ncmsupplies.com | www.ncmsupplies.com

Fiber Optic Splice Closure
In-Line Type

Model: NCM-FOSC-IL-08-C

Item	Value				
	Split Ratio Signal Percentage %	Max Insertion Loss (dB)		Max Uniformity	P/N
		Tap	Thru		
1x8 Fiber Optic Splice Closure	EVEN	11		2	10274021824

Technical Data

Parameter	Unit	Specification
Insertion Loss	dB	≥ 55
Uniformity of I. L	dB	≤1.5
PDL	dB	≤0.20
Voltage Strength	KV(DC)/1MIN	15
Optimal Operating Temperature	ºC	-25 to +60
Axial Tension	N/1min	1000
Stretching Resistance	N/cm2 (1min)	2000
Insulation Resistance	MΩ	$2*10^4$
Durability		Modified PP material with anti-UV to improve durability


Unless otherwise noted, the above specifications reflect typical device performance at stated reference levels in the recommended operating configuration(s). Specifications are subject to change without notice.


NCM-FOSC-IL-08-C (1.2 Rev2019) © 2000-2019 NCM Supplies – All Rights Reserved

NCM Supplies Inc.
8125 NW 64th ST. Miami, Florida 33166
Phone: 305-640-0461 Fax: 305-639-2684
ncm@ncmsupplies.com | www.ncmsupplies.com

Model: NCM-FOSC-IL-08-C

Exterior Structure Diagram

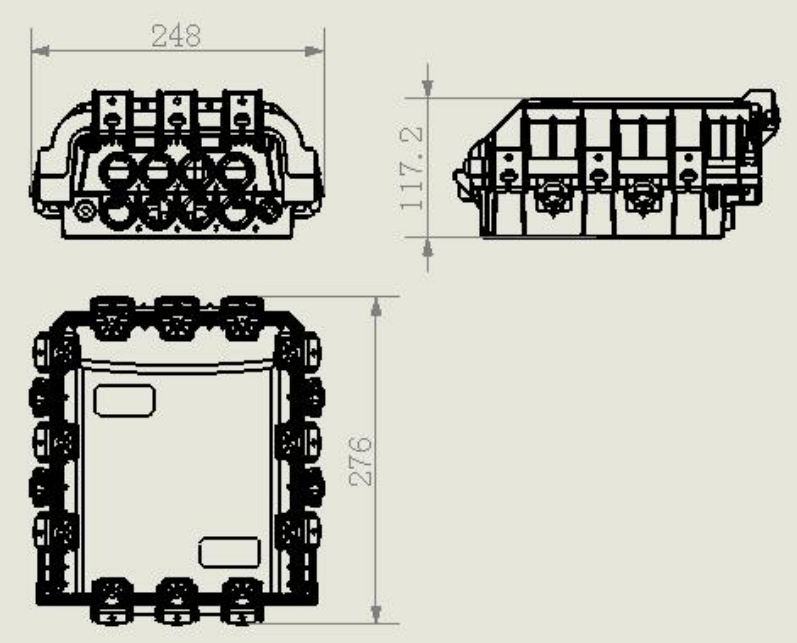

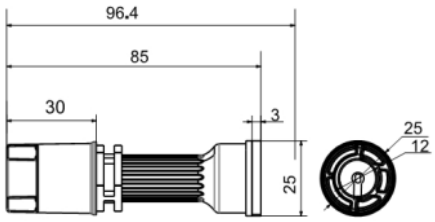


Unless otherwise noted, the above specifications reflect typical device performance at stated reference levels in the recommended operating configuration(s). Specifications are subject to change without notice.

NCM-FOSC-IL-08-C (1.2 Rev2019) © 2000-2019 NCM Supplies – All Rights Reserved

NCM Supplies Inc.
8125 NW 64th ST. Miami, Florida 33166
Phone: 305-640-0461 Fax: 305-639-2684
ncm@ncmsupplies.com | www.ncmsupplies.com

Model: NCM-FOSC-IL-08-C

Installation Kit

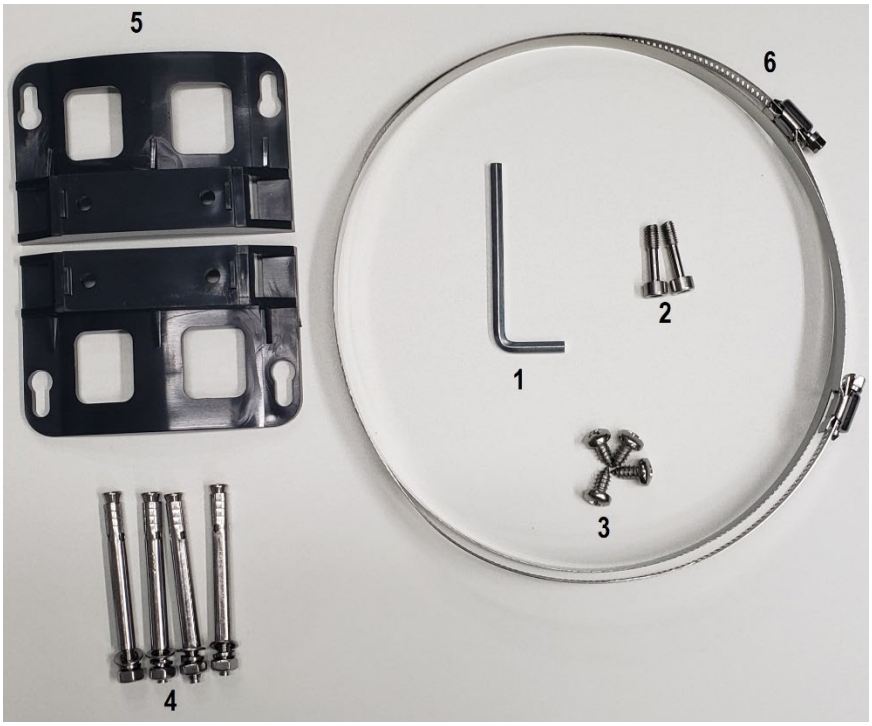

1-Hex key
2-Socket head screws
3-Pan head screws
4-Expansion bolts
5-Plastic holder (pole or wall mount)
6- Stainless steel pole band

Unless otherwise noted, the above specifications reflect typical device performance at stated reference levels in the recommended operating configuration(s). Specifications are subject to change without notice.

NCM-FOSC-IL-08-C (1.2 Rev2019) © 2000-2019 NCM Supplies – All Rights Reserved

NCM Supplies Inc.
8125 NW 64th ST. Miami, Florida 33166
Phone: 305-640-0461 Fax: 305-639-2684
ncm@ncmsupplies.com | www.ncmsupplies.com