Features

Ideal for short spans and low mechanical loads.

Superior fatigue strength aluminum alloy wire.


Fast and easy installation.


Neoprene dip finish (rods).

ID tags show cable diameters.

Designed to support Fiber Optic Cables.

Provided with color marks for identification.

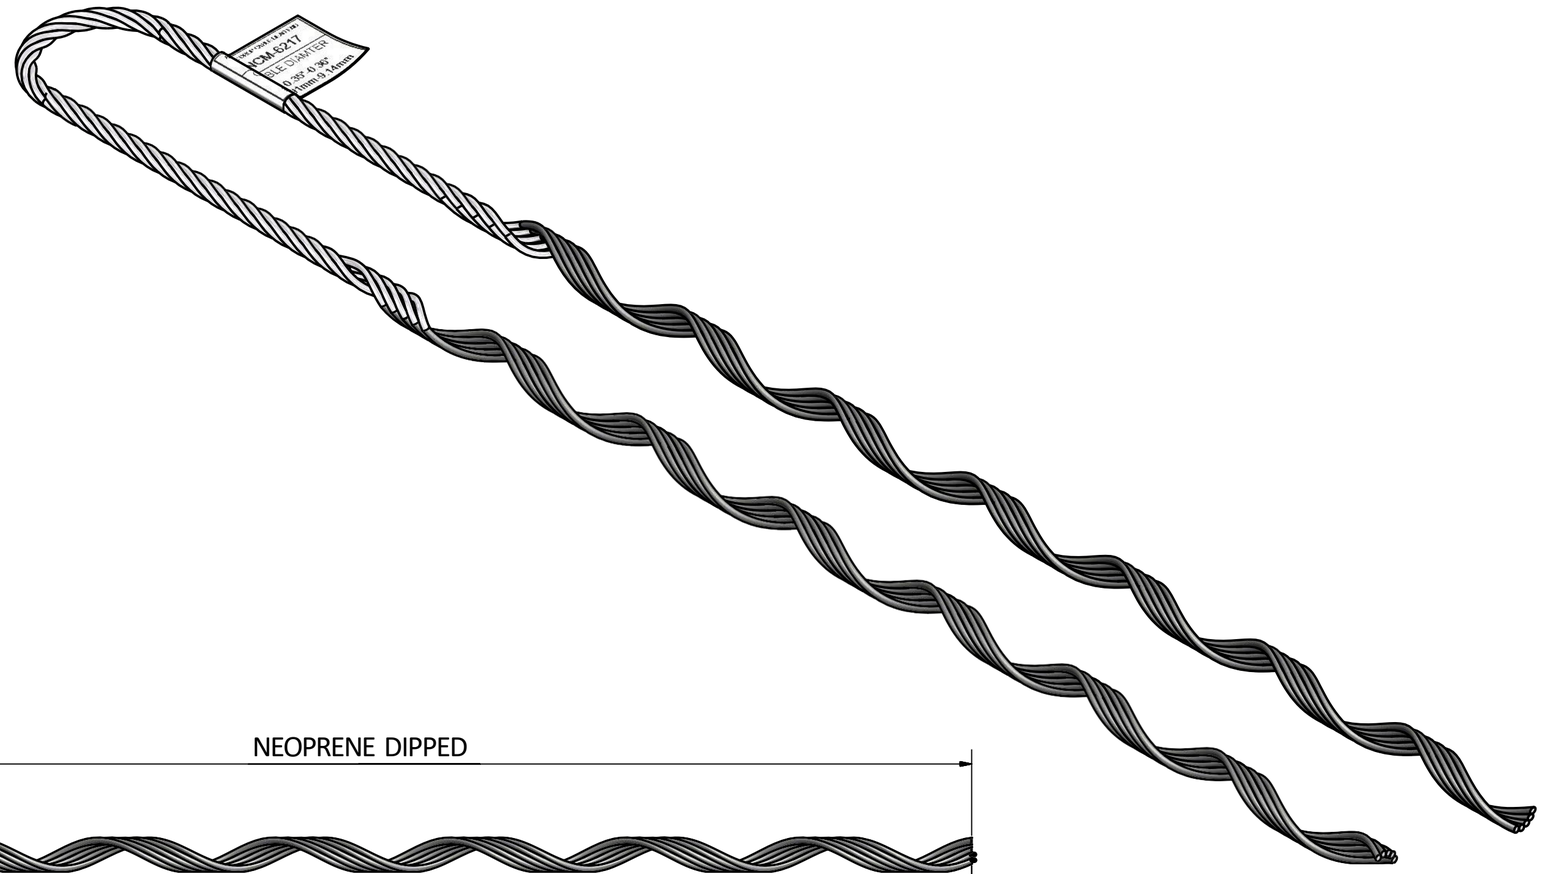

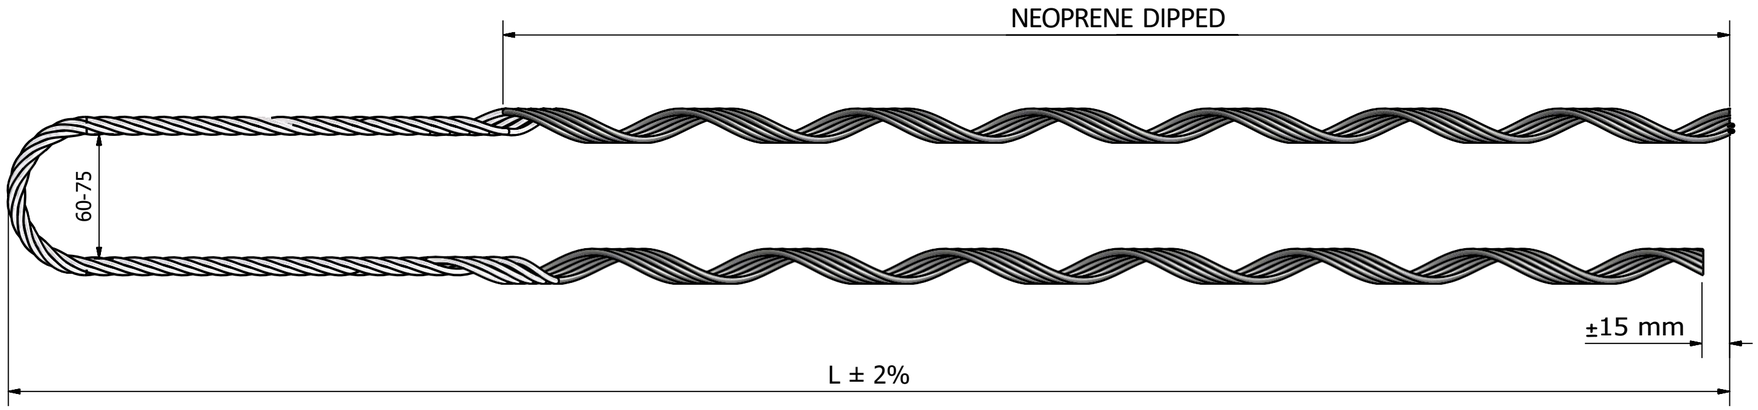

NCM P/N	Supported Cable Diameters				Length (L)		Color Mark
	Min (in)	Max (in)	Min (mm)	Max (mm)	in	M	
NCM-H6300-01	0.351	0.360	8.9	9.1	24	0.61	Black
NCM-H6300-02	0.460	0.505	11.7	12.8	33	0.84	Green
NCM-H6300-03	0.507	0.555	12.9	14.1	37	0.94	Pink
NCM-H6300-04	0.559	0.614	14.2	15.6	42	1.07	Yellow
NCM-H6300-05	0.685	0.751	17.4	19.1	49	1.24	Brown

NCM Supplies Inc.
8125 NW 64TH Street, Miami, Florida 33166 - Phone:305-640-0461
Fax:305-639-2684 ncm@ncmsupplies.com | www.ncmsupplies.com
© 2000-2018 NCM Supplies – All Rights Reserved

DRAWN IN	7/10/2014	NCM SUPPLIES
CHECKED		TITLE: Lite Tension Dead-End
QA		
MFG		
APPROVED		SIZE C · DWG NO NCM-H6300-XX · REV A
		SCALE · SHEET 1 OF 1