Features

Ideal for short spans and low mechanical loads.

Made from a High-Strength Urethane material.


Support up 0.75" (19 mm) wide bands.

UV resistant.

Support up 0.75" (19 mm) cable diameters.

Designed to support Fiber Optic Cables.



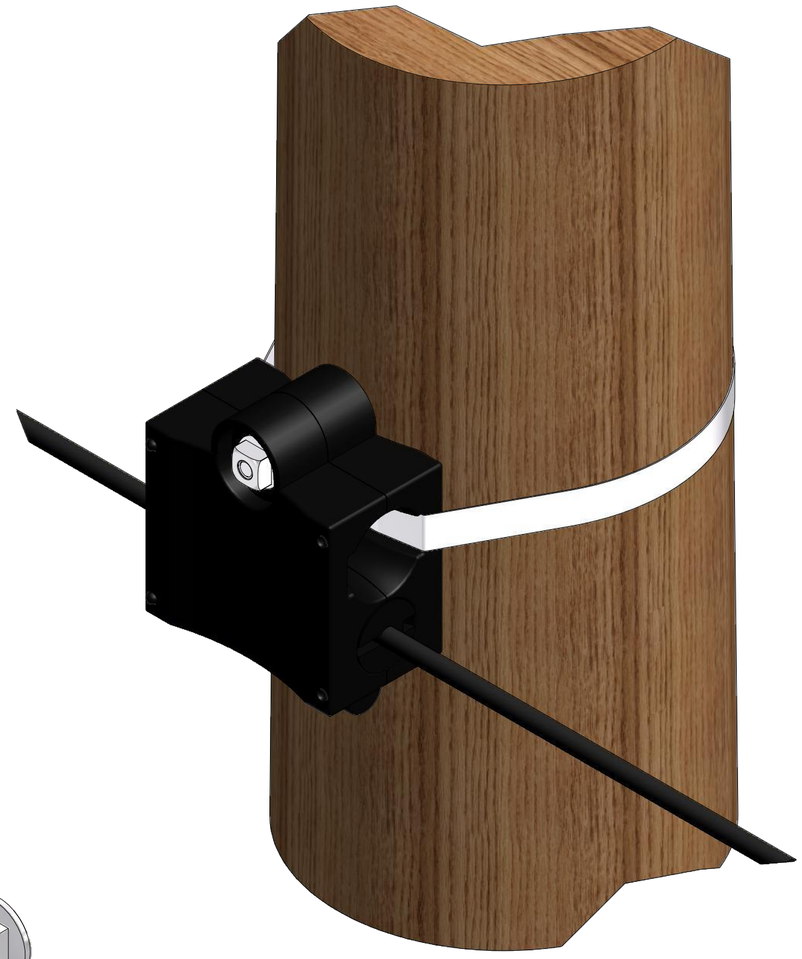

NCM P/N	Supported Cable Diameter				
	D (mm)	Min (in)	Max (in)	Min (mm)	Max (mm)
NCM-H6301-01	9.5	0.413	0.466	10.5	11.6
NCM-H6301-02	10.3	0.433	0.511	11.0	13.0
NCM-H6301-03	14.0	0.590	0.669	15.0	17.0
NCM-H6301-04	16.4	0.669	0.748	17.0	19.0

NCM Supplies Inc.
8125 NW 64TH Street, Miami, Florida 33166 - Phone:305-640-0461
Fax:305-639-2684 ncm@ncmsupplies.com | www.ncmsupplies.com
© 2000-2018 NCM Supplies – All Rights Reserved

DRAWN IN	7/13/2014	NCM SUPPLIES
CHECKED		TITLE: Tangent Support for ADSS Fiber
QA		
MFG		
APPROVED		SIZE C · DWG NO NCM-H3601-XX · REV A
		SCALE · SHEET 1 OF 1